




Be Right™

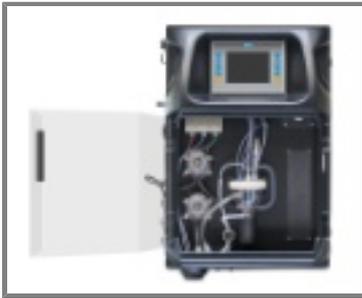

EZ3504 Chloride Analyser

Termékszám: EZ3504.XXXXXXXXXX
HUF Ár (nettó): Elérhetőségünk

Online ion-selective Chloride measurements with standard addition for industrial applications

ISE technology for complex water matrices

The EZ3500 Series are used for water monitoring applications where ion-selective electrodes are the preferred analytical technique, but the water matrix is complex. Standard addition helps minimise matrix interferences that otherwise might contribute to the output signal of the electrode.

Discontinuous, automatic standard addition

The EZ3500 Series run discontinuous measurements with careful addition of a known standard in an analysis vessel. Discontinuous ISE analysis enhances control over the potentiometry, eliminates cross-contamination between cycles and reduces overall reagent consumption.

The EZ3500 Series combine unique technology with a set of analysis, control and communication features in an industrial analyser mainframe designed for the highest performance:

- Smart automatic features
- Control and communication via industrial panel PC
- Analogue and digital output options
- Multiple stream analysis (up to 8 streams)

There are many additional options available. Please contact Hach for more details.

Műszaki adatok

A doboz tartalma:	EZ3504 Chloride Analyser, Instruction Manual, 1 x Double Bit Door Key, 1 x Mounting Brackets, 1 x ISE Electrode and Chloride Electrode, combined, and 2 x empty 5L Reagent Containers with Fittings (for Buffer and Standard Cl Solution)
Analóg kimenetek:	Active 4 - 20 mA max. 500 Ohm load, standard 1, max. 8 (option)
Anyag:	Hinged part: Thermoform ABS, door: PMMA
	Wall section: Galvanised steel, powder coated
Automatikus tisztítás:	Igen
Demineralised water:	For rinsing

Detektálási határ:	1 mg/L
Digitális kimenetek:	Optional: Modbus (TCP/IP, RS485)
Earth connection:	Dry and clean earth pole with low impedance (< 1 Ohm) using an earth cable of > 2.5 mm ²
Garancia:	24 hónap
Instrument air:	Dry and oil free according to ISA-S7.0.01-1996 quality standard for instrument air
Interferenciák:	Bromide, sulphide, iodide, cyanide ions may interfere. Mercury must be absent. Ammonia and thiosulphate may interfere. Fats, oil, proteins, surfactants and tar.
Kalibrálás:	Automatic, 2-point; frequency freely programmable
Környezeti hőmérséklet:	10 - 30 °C ±4 °C deviation at 5 - 95% relative humidity (non-condensing)
Lefolyócső:	Atmospheric pressure, vented, min. Ø 32 mm
Mérés módszer:	Discontinuous measurement by combined ion-selective electrode with standard addition
Méréstartomány:	5 - 100 mg/L Cl ⁻
	Optional:
	1 - 25 mg/L Cl ⁻
	2.5 - 50 mg/L Cl ⁻
Méreték (MxSZxM):	690 mm x 465 mm x 330 mm
Minta hőmérséklet:	10 - 30 °C
Minta minőség:	Maximum particle size 100 µm, < 0.1 g/L; Turbidity < 50 NTU
Minta: nyomás:	By external overflow vessel
Mintaáram:	100 - 300 mL/min
Mintacellák:	8 minutes
Mintautak száma:	1, 2, 4 or 8
Módszer név:	Ionselective (standard addition)
Paraméter:	Chloride
Pontosság:	Better than 2% full scale range for standard test solutions
Reagent Requirements:	Keep between 10 - 30 °C
Riasztás:	1x malfunctioning, 4x user-configurable, max. 24 VDC/0.5 A, potential free contacts
Súly:	25 kg
Szünet mód:	100 - 240 VAC, 50/60 Hz
Tanúsítványok:	CE compliant / UL certified
Teljesítmény:	100 - 240 VAC, 50/60 Hz
	Max. power consumption: 120 VA
Típus:	EZ3504
Validation:	Automatic; frequency freely programmable
Védettségi osztály:	Protection class: Analyser cabinet: IP44 / Panel PC: IP65

A doboz tartalma

EZ3504 Chloride Analyser, Instruction Manual, 1 x Double Bit Door Key, 1 x Mounting Brackets, 1 x ISE Electrode and Chloride Electrode, combined, and 2 x empty 5L Reagent Containers with Fittings (for Buffer and Standard Cl Solution)